

FIG. 1 is a cross-sectional view of a circular device 20, such as a watch movement. The device is enclosed in a case 36 with a bezel 22. A central gear mechanism is shown, including a gear 35 and a pinion 101. A rotor 40 is positioned below the gear. A central shaft 24 is shown with a spring 26 and a stop 27. The device is divided into a grid of sections, with various components labeled with reference numerals. The label 'F' is visible in the bottom right corner.

Fig.2

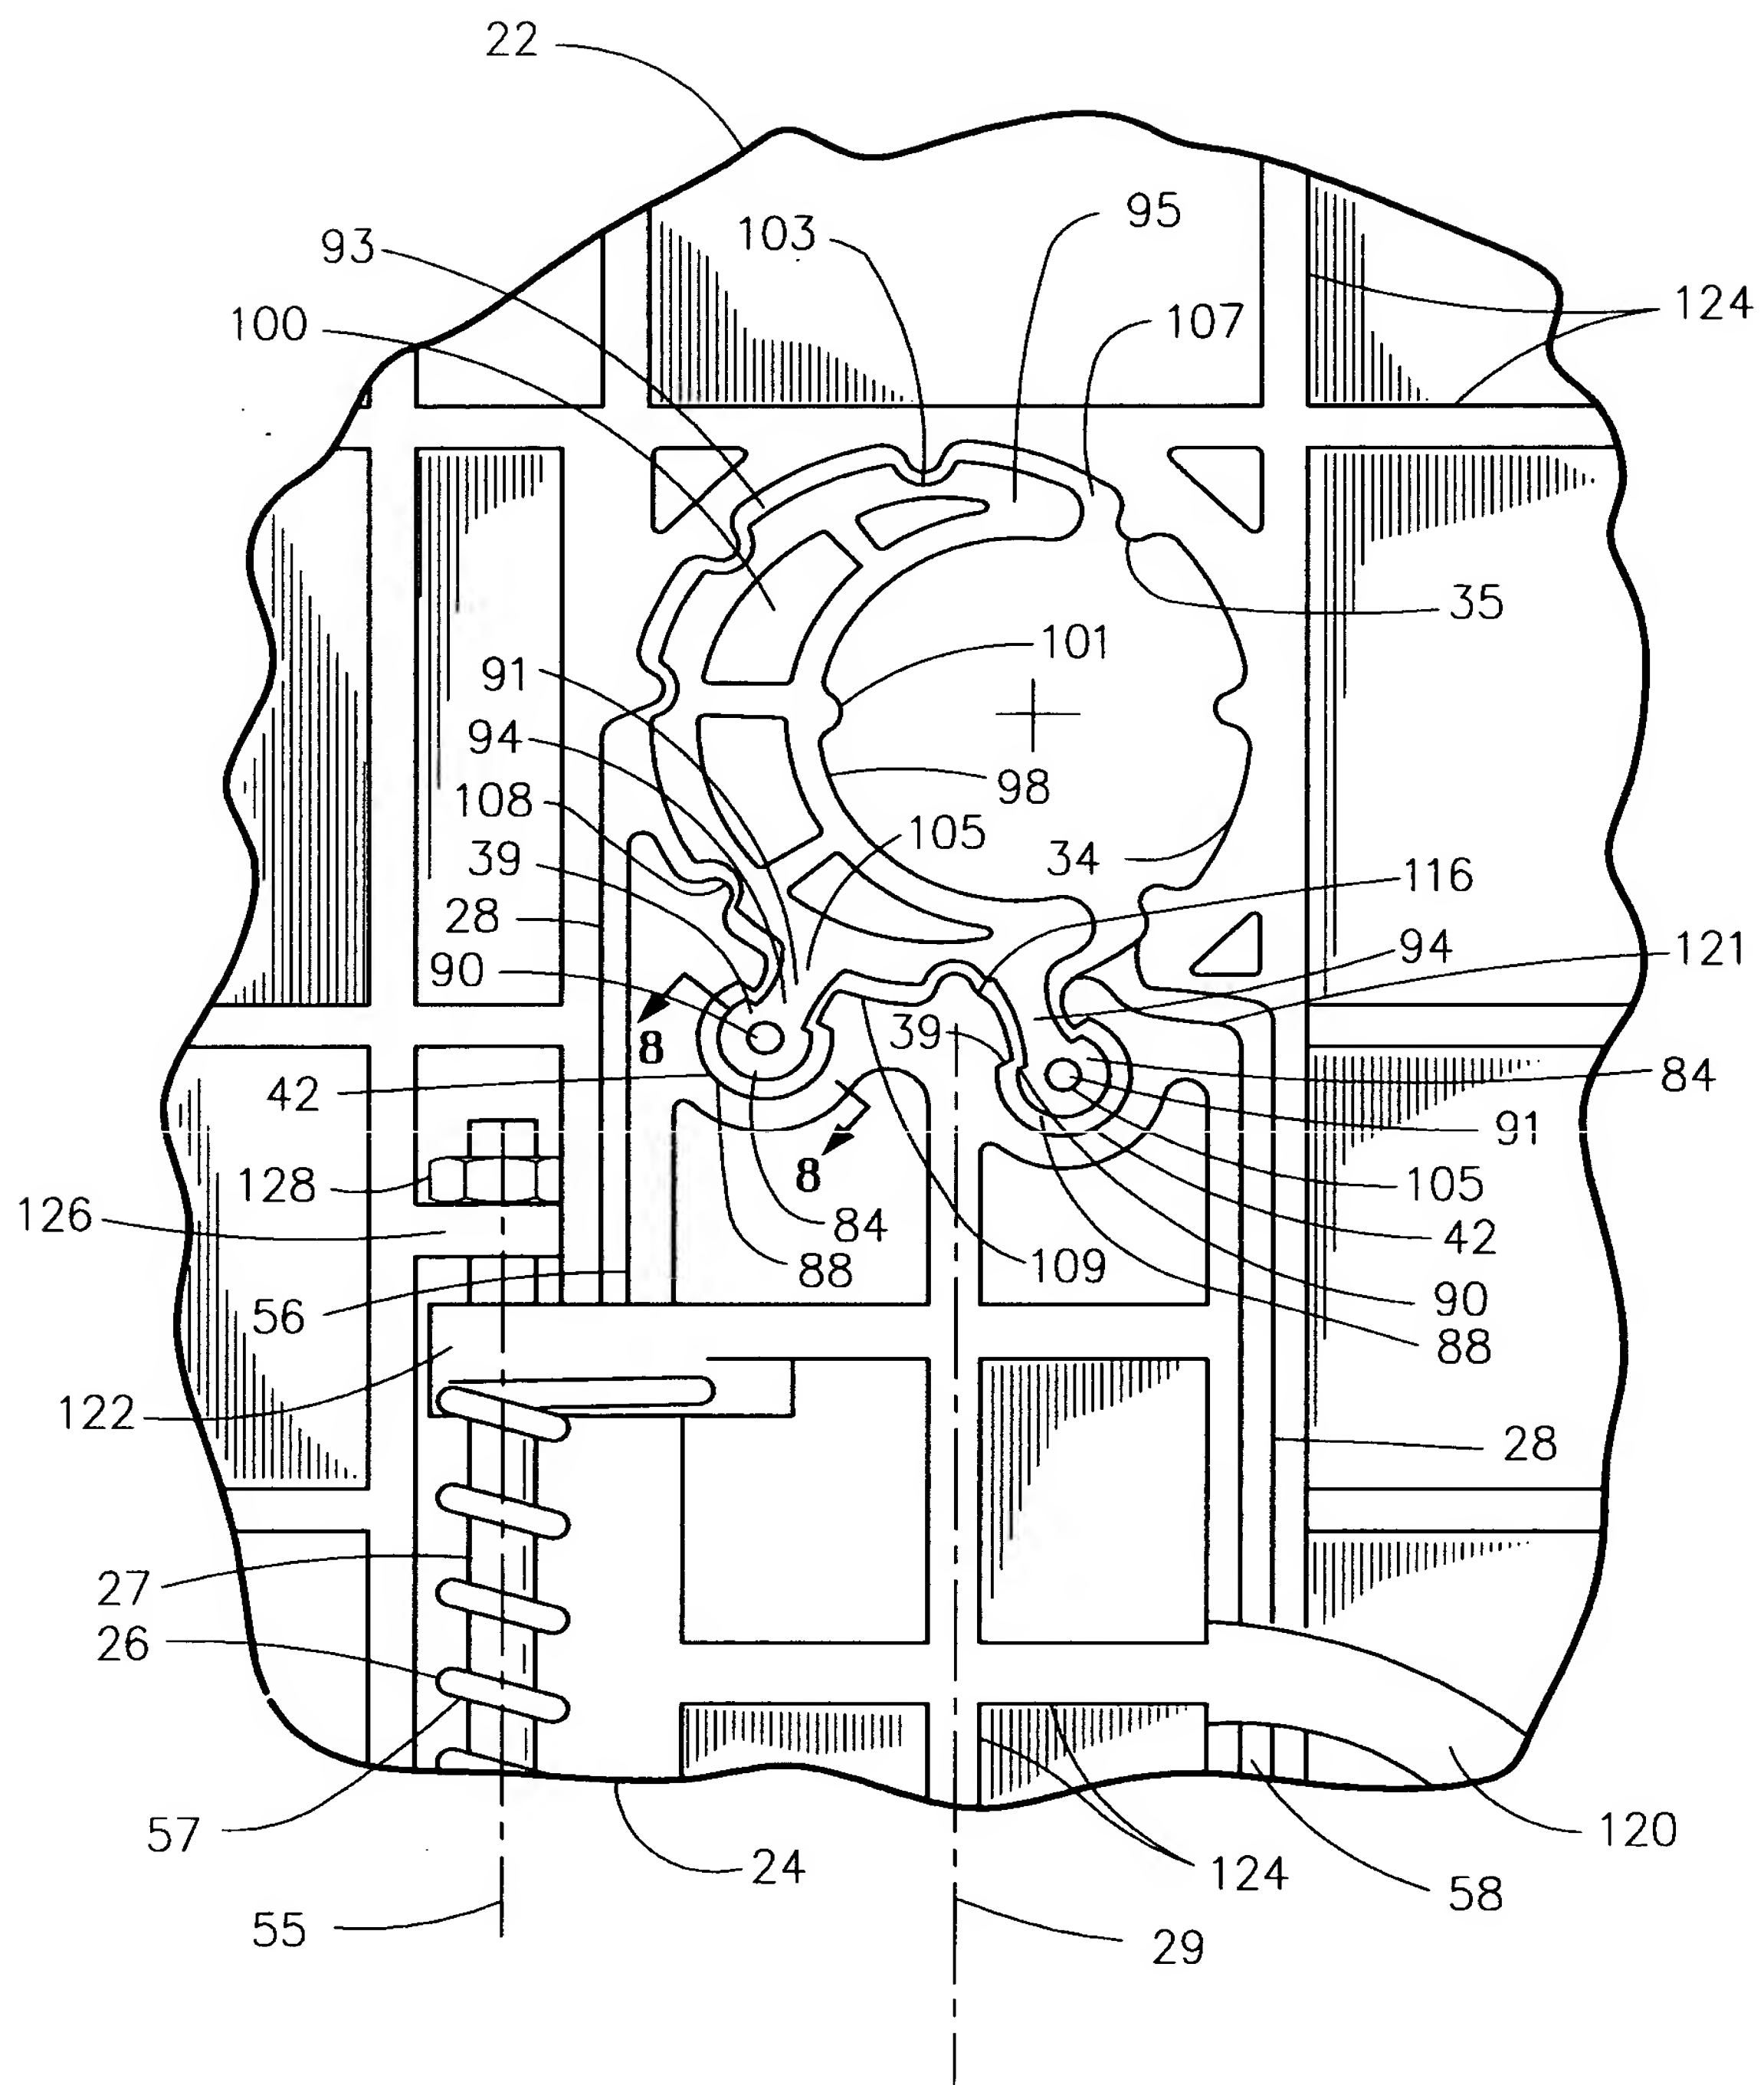


Fig.3

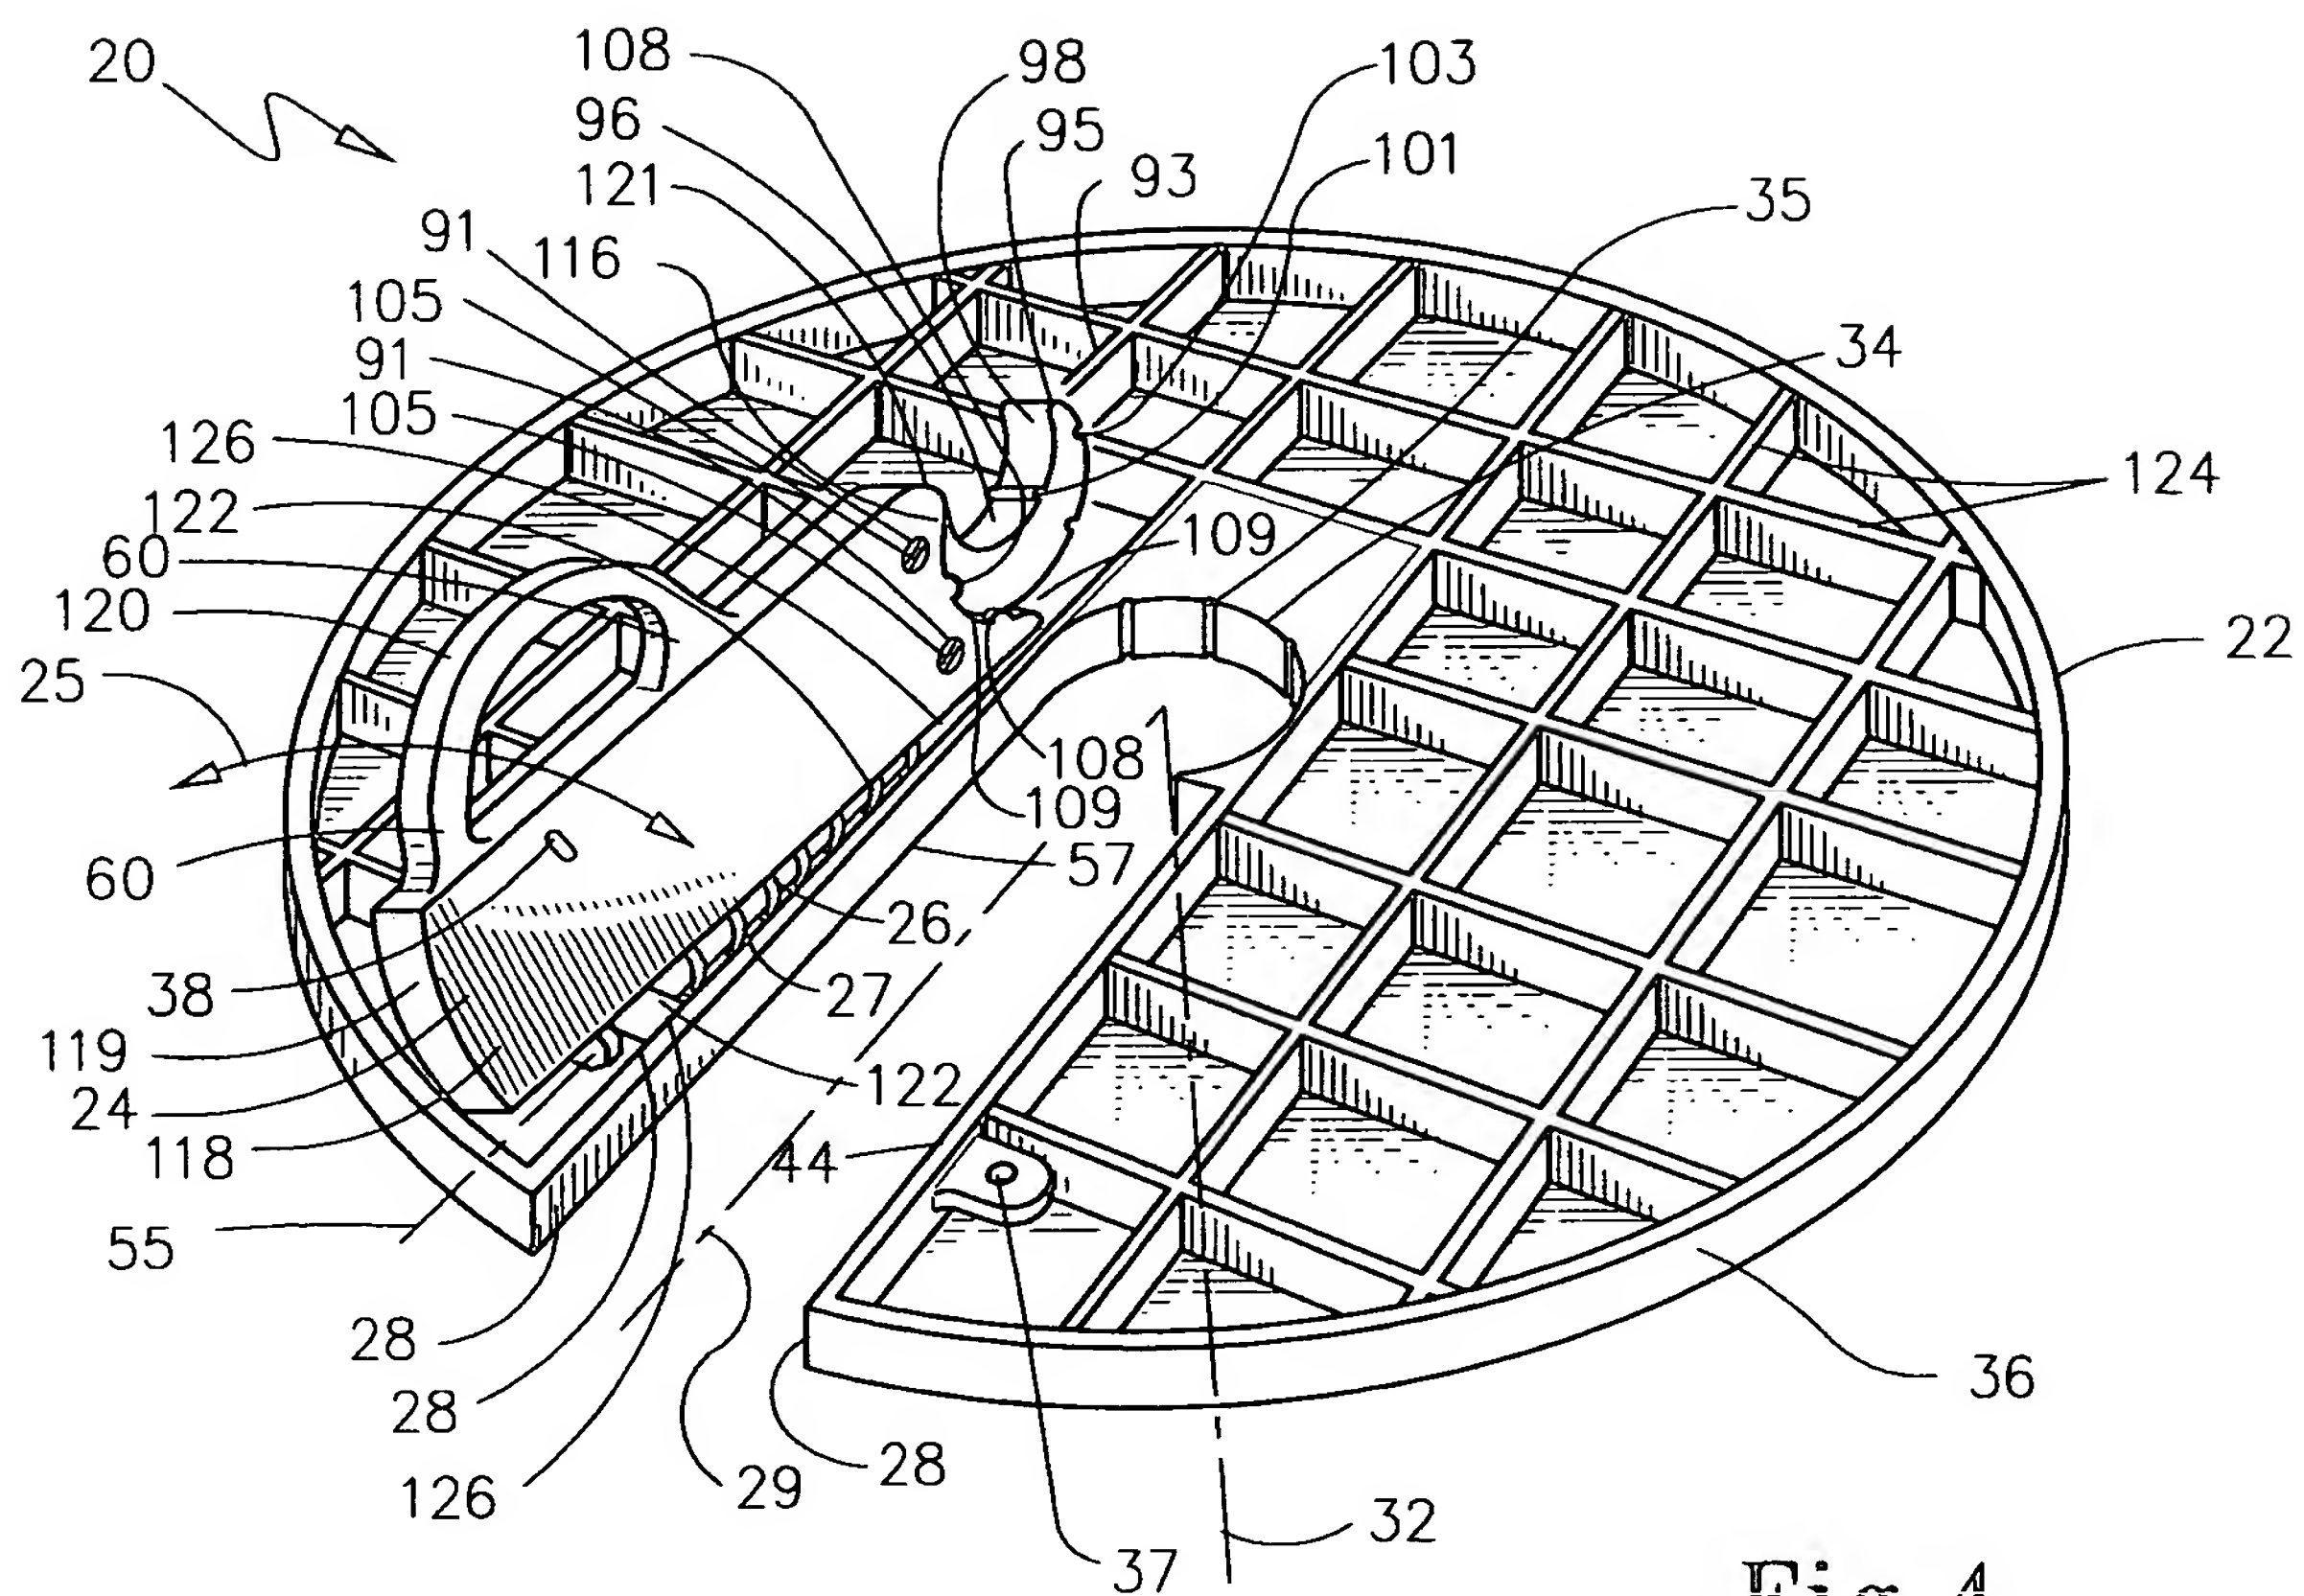


Fig.4

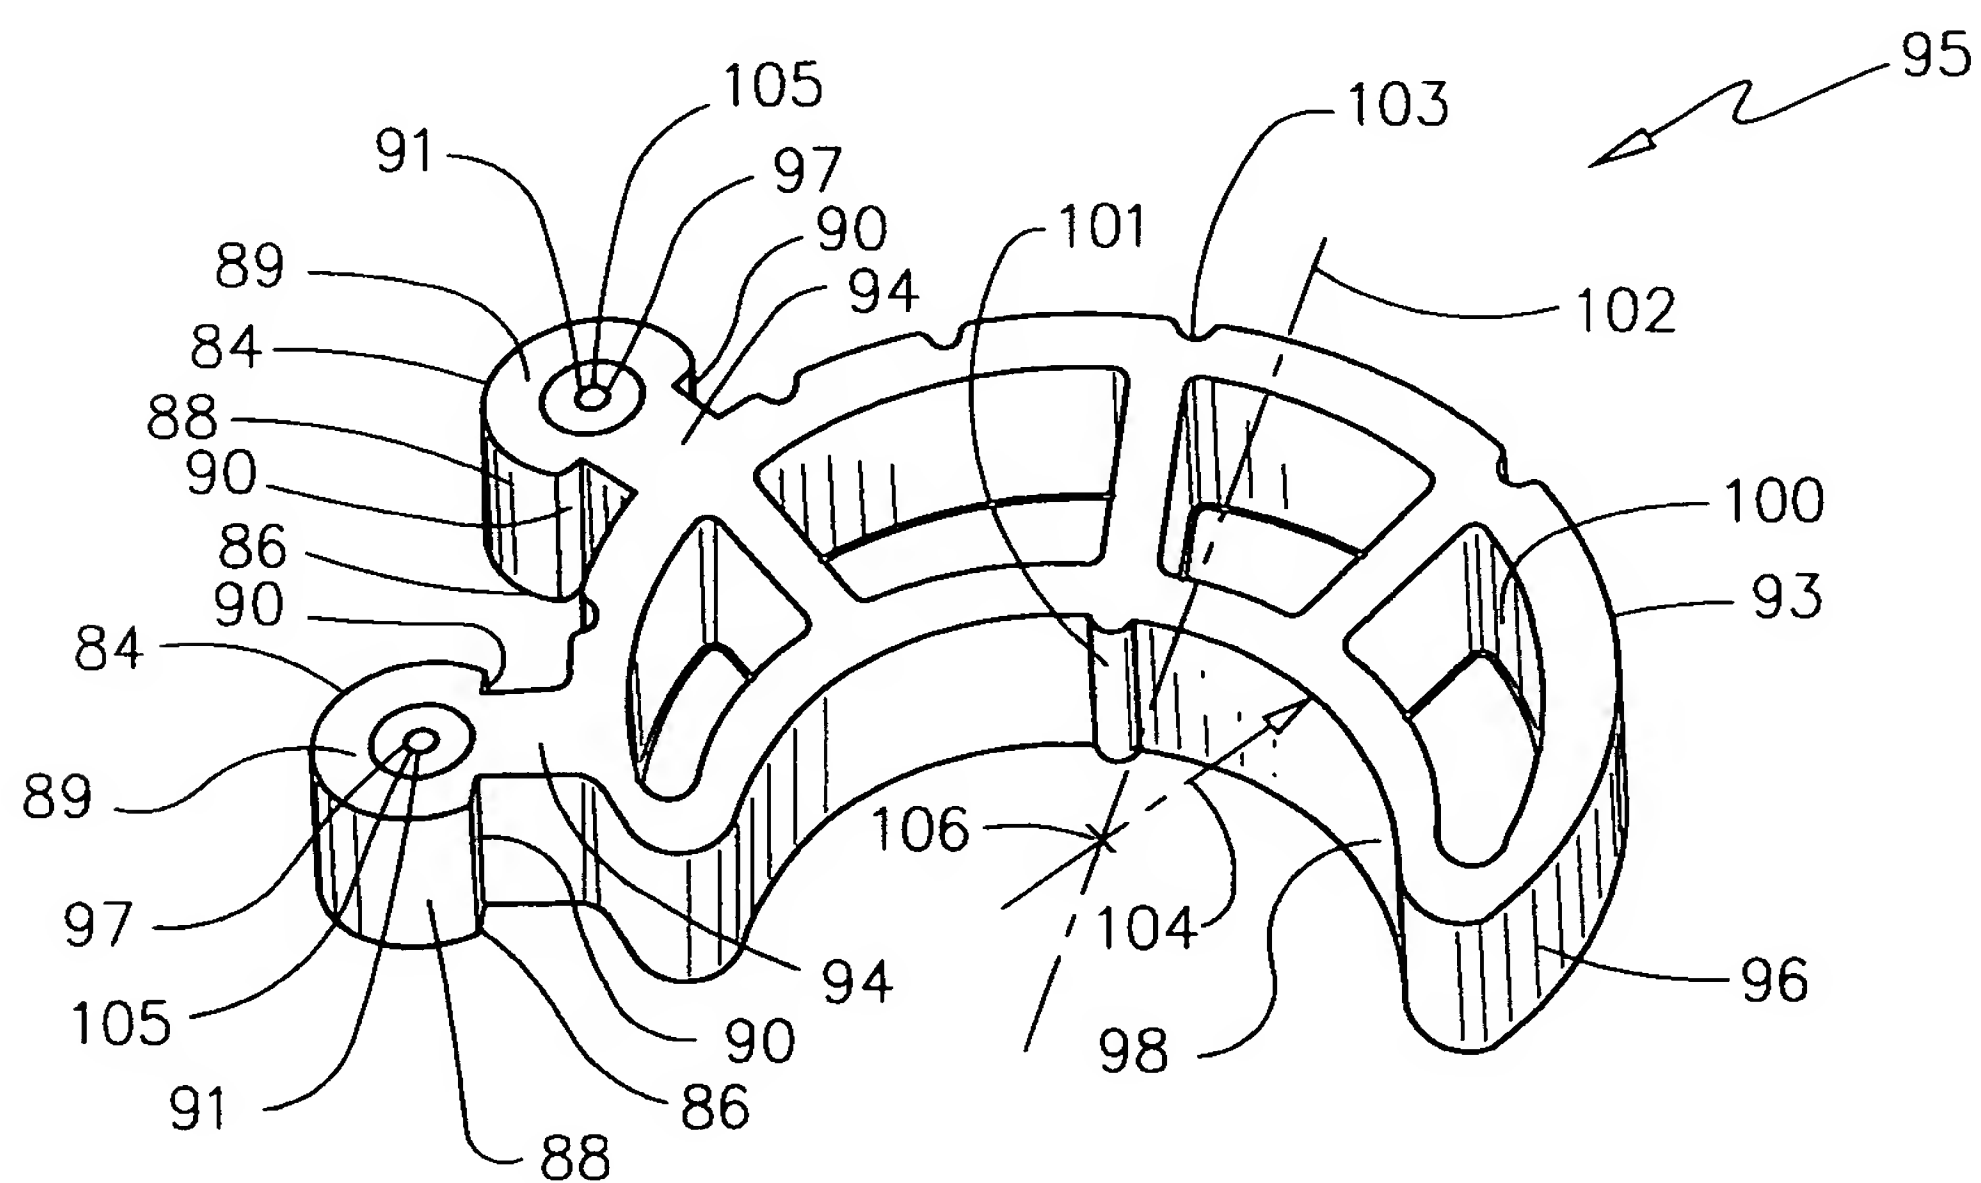
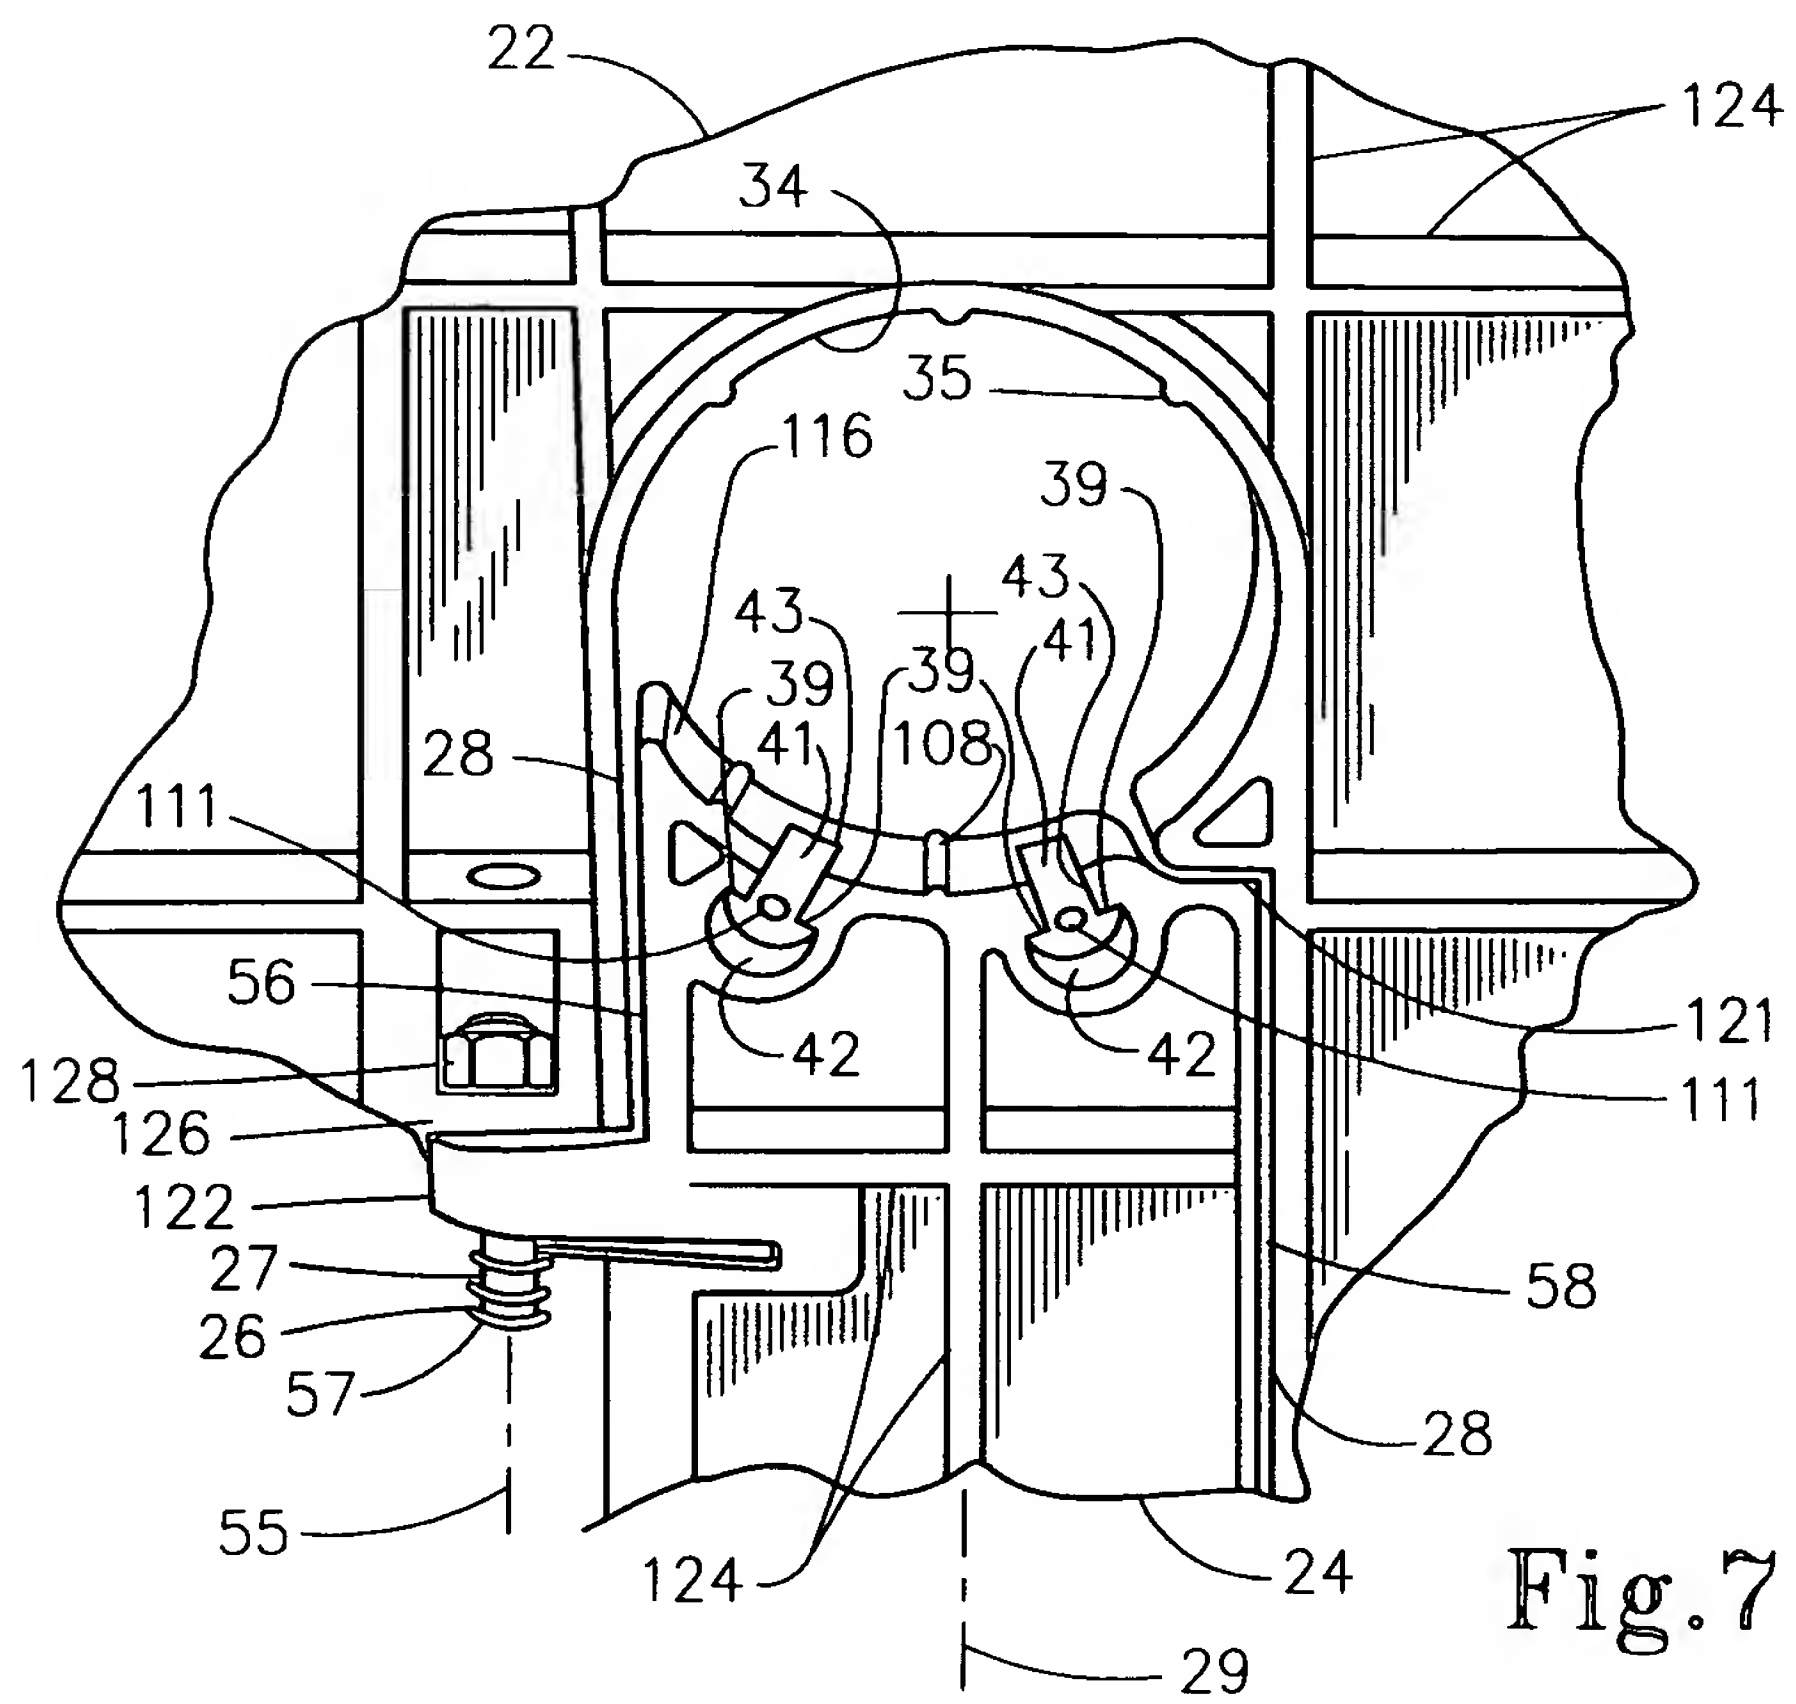
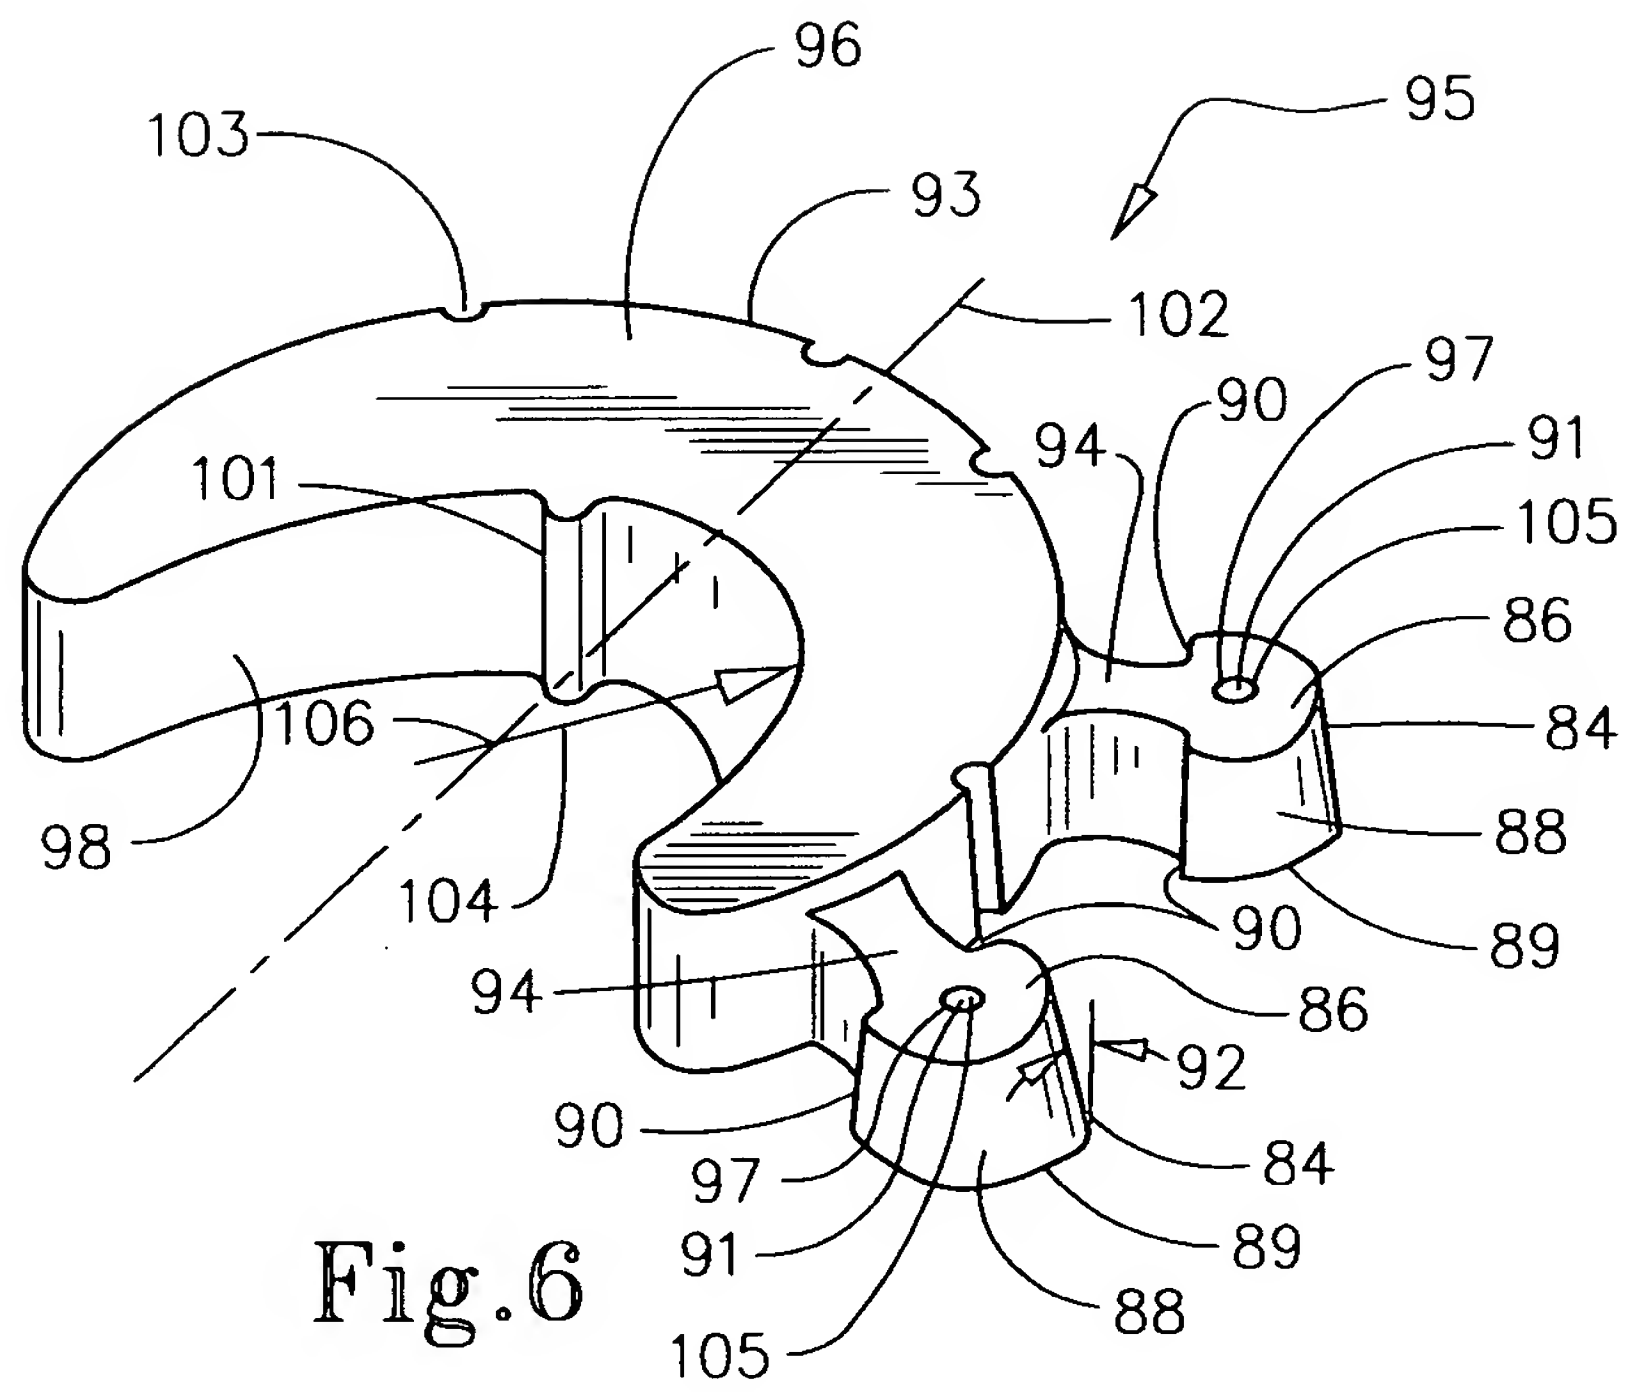


Fig.5



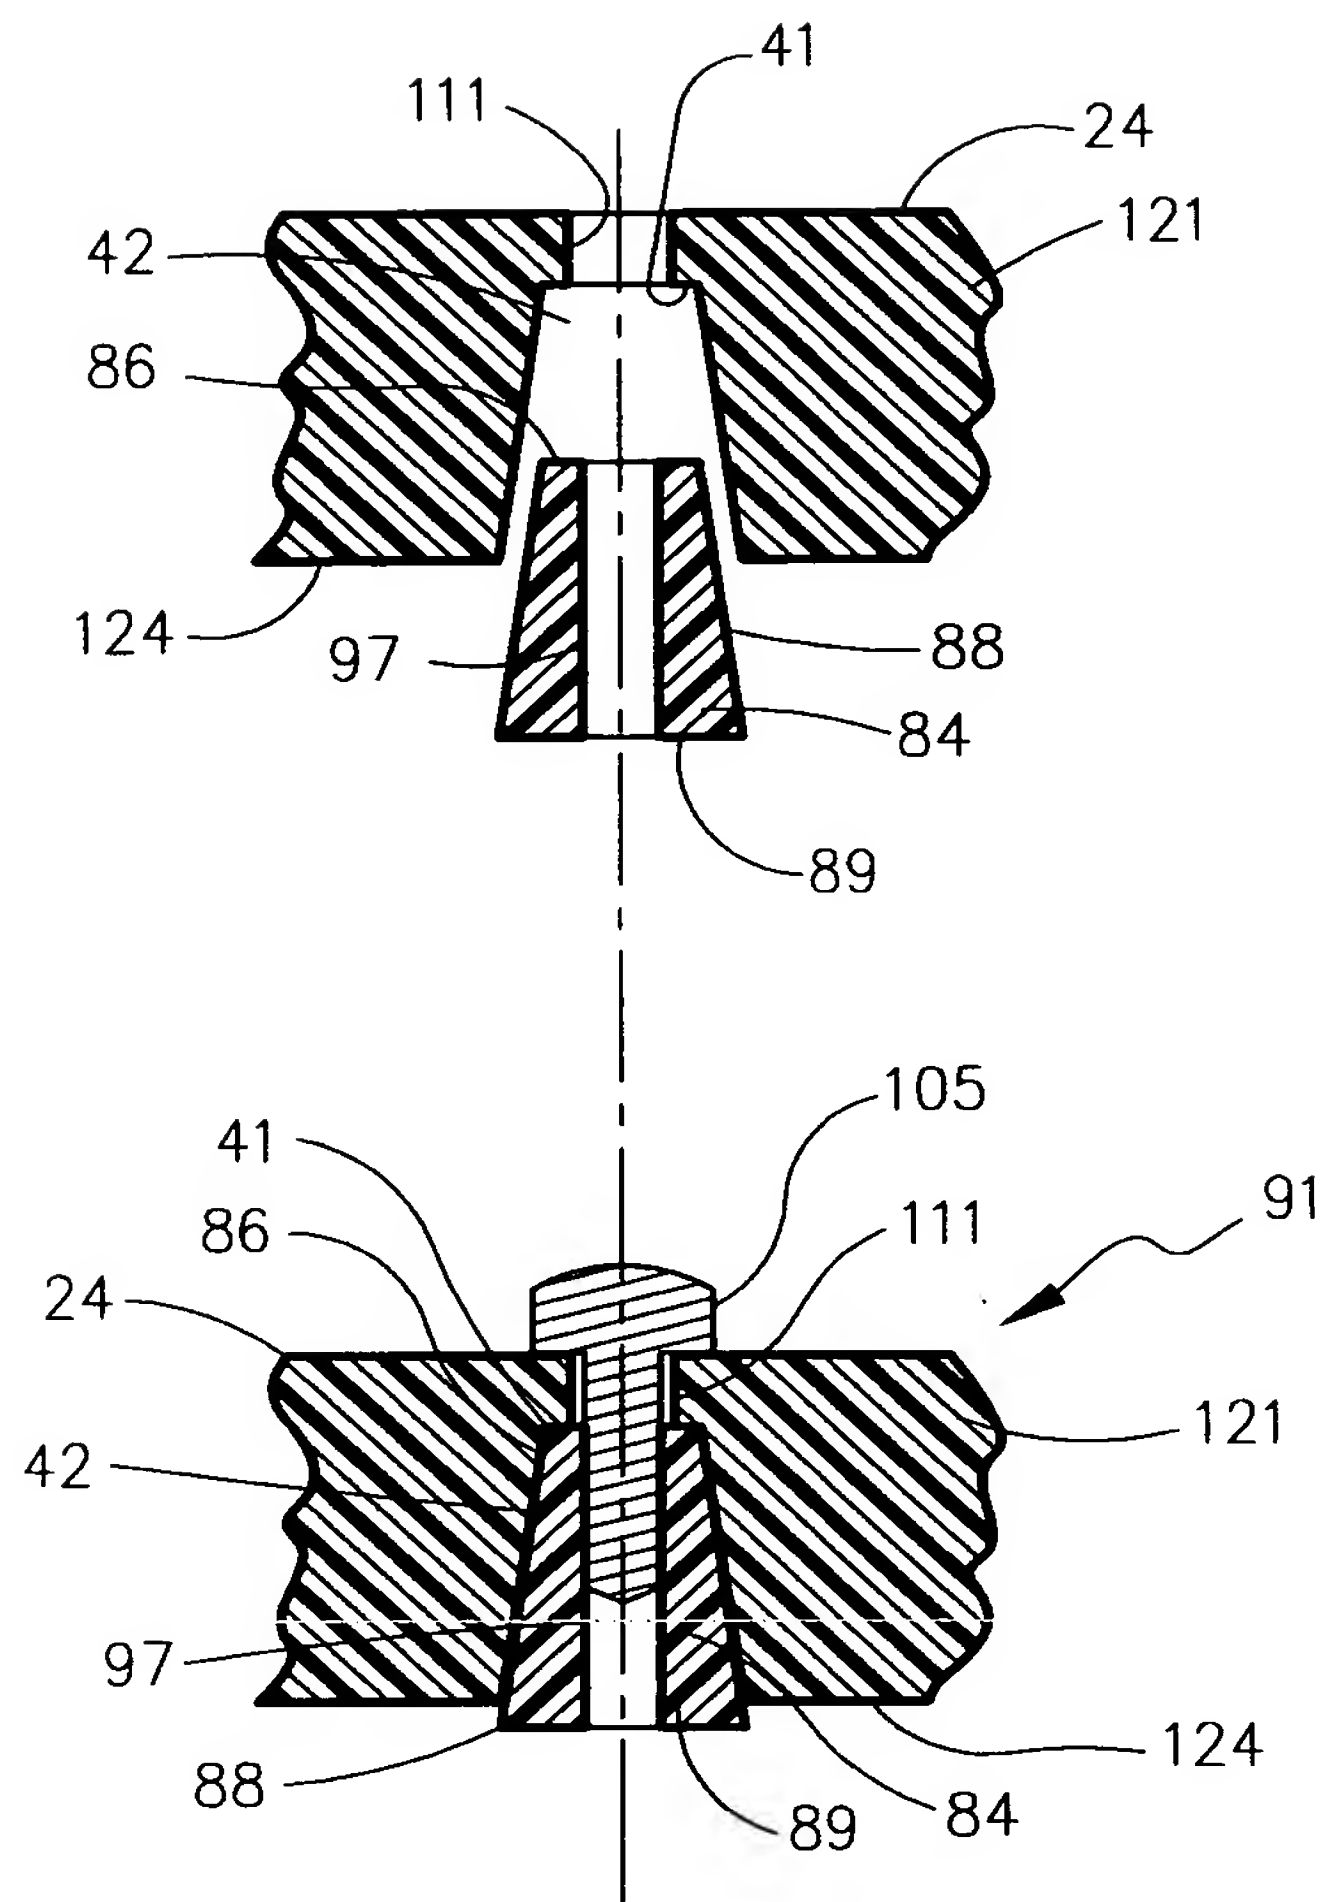


Fig.8

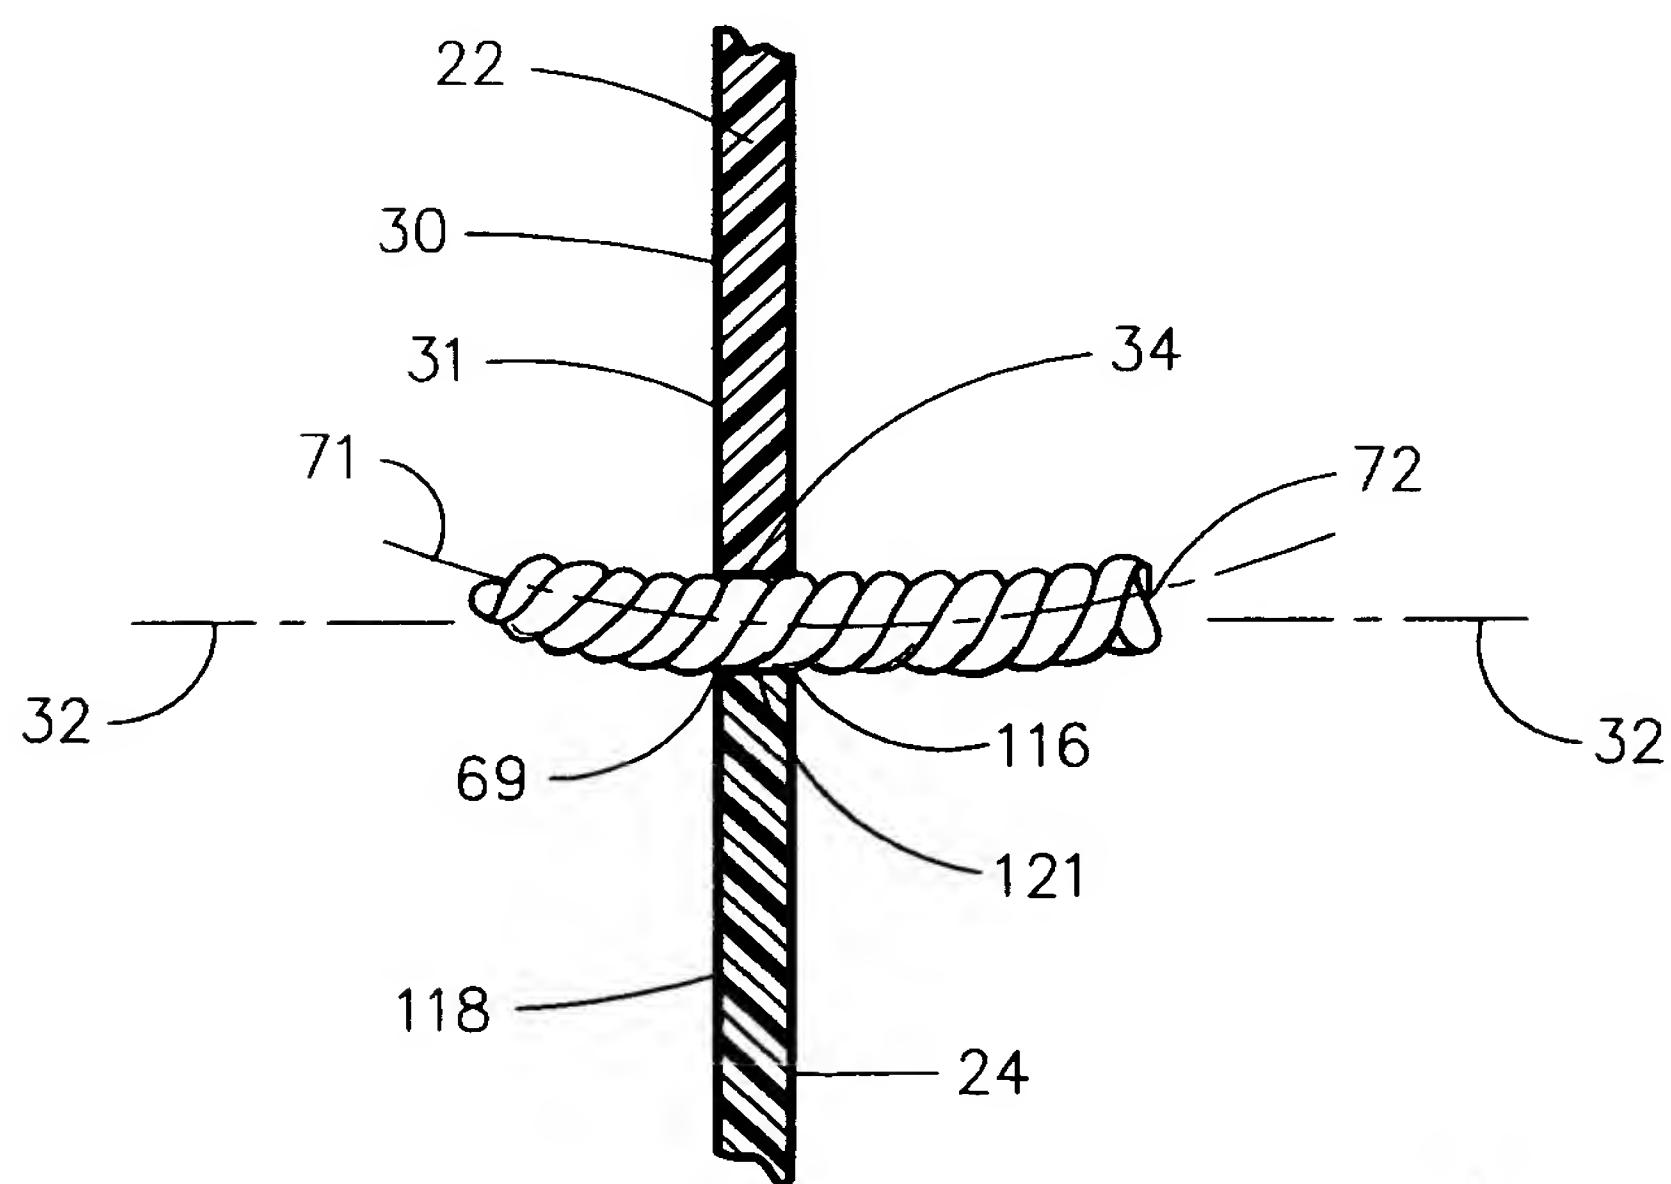


Fig.10

